

3-1/2 DIGIT LCD DISPLAY

4-20 mA DC INPUT, LOOP POWERED, DIRECT READING


The Model 328 display is a potted plug-in module for rough services and will withstand some corrosive environments. The Model 328 is a 4-20mA loop powered 3-1/2 digit LCD display. The display has voltage spike protection and is supplied precalibrated at 0-100%, but can be field calibrated to engineering units from 4 mA = 0-200, minimum to 20 mA = 200-1999 maximum. The position in which the decimal point is displayed is chosen by a jumper setting on the front of the display body.



328 DISPLAY MODULE ONLY




328 DISPLAY MOUNTED IN AN X-P HOUSING

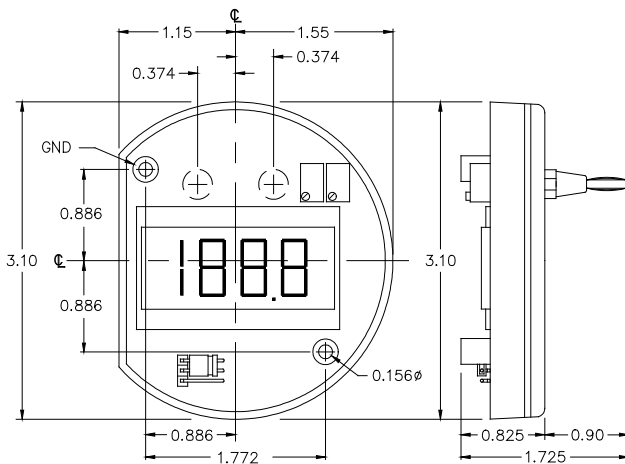

MODULE DIMENSIONS

MODEL NUMBERING SYSTEM

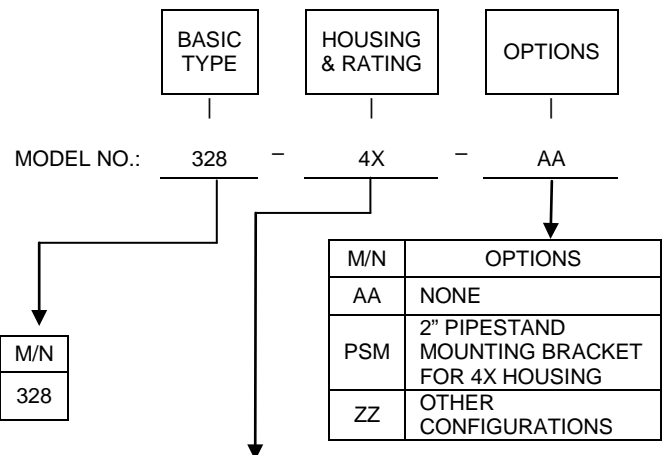

M/N	HOUSING & RATING
PI	BASIC PLUG-IN MODEL
4X	4X, PVC, SURFACE MOUNT, HOSEPROOF
7W	EXPROOF, CLASS 1, DIVISION 1, GROUPS BCD, EFG; ALSO 4X HOSEPROOF
7D	SAME, EXCEPT ALL 300 STAINLESS STEEL

CONSULT APPLICATION NOTE #991 FOR DETAILS OF HOUSINGS
HOUSING LISTING: CSA (CANADA) NRTL/C (USA)



Engineered Sensors - For Difficult Services

585 Fortson Street
Shreveport, La. 71107 - USA
Ph: +1(318) 424-8471
Fax: +1(318) 425-2421
E-mail: sales@deltacnt.com
Web: www.deltacnt.com