

MODEL 173 PROBE TYPE LEVEL TRANSMITTER

DIGITAL CIRCUITRY FOR DEMANDING SERVICES

PUSH-BUTTON CALIBRATION, NARROW RANGES

- 4-20 mA, 2 wire, loop powered
- HART® Protocol available option
- Digital R.F. Admittance measuring circuitry
- Intrinsically safe probe circuit
- Insensitive to process coatings and buildup
- Simple, two-point calibration. You don't have to empty (or fill) the tank to calibrate accurately
- Can be reverse calibrated (20 mA = empty tank)
- Choice of integral or remote electronics module
- Corrosion resistant, NACE #MR-01-75 optional
- Process pressure as high as 10,000 psig (700 Bar)
- Process Temperature: -460 to +1500°F (-273 to +800°C)
- Wide choice of wetted materials includes 316 SS, PTFE, Alloy 20, Kynar®, Monel, and Ceramics
- User interface LCD digital display with 4 key input
- Threaded, flanged, or bracket probe mounting
- Epoxy sealed electronics module survives harsh environments and area vibration
- The 173 is essentially 100% repeatable over its range.
- Built in voltage spike protection, heavy 12 gage termin

APPLICATION

The Model 173 probe style transmitter is used for high reliability measurement of liquid level and interface position. It is insensitive to variations in liquid conductivity, fluid coatings, or solids buildup. The instrument utilizes highly stable crystal references and filters; this allows it to work on narrow ranges and to reliably transmit the level of low dielectric materials. Its sensing probe must be installed in the liquid container so that its active portion passes through the range of fluid elevation points to be measured. The probe is normally inserted vertically down into the liquid from the top of the tank or vessel. Probes can be provided for penetration or mounting at any angle and can be up to 100 feet (33m) long. The electronics module is potted in epoxy for improved reliability under conditions of vibration and corrosion.

It will accurately measure almost any kind of liquid, including: water, oil, gasoline, acid, caustic, soup, milk, gear lube, and antifreeze. It is particularly advantageous when used on fuel oil tanks, cooling tower basins, fruit juice, chlorine storage tanks, irrigation channels, and pharmaceutical reactors. It will also do a good job on some powdered and granular solids under controlled conditions. The isolated loop powered 4-20 mADC signal is ideal for driving controllers, displays, and supervisory computers.

It will correctly transmit the position of an interface by sensing the ratio of the admittance of the two liquids. Typical interfaces include oil/water, gasoline/acid, and foam/effluent. Interface control is important in crude oil separation, flotation mining, seed oil milling, and fuel tank sediment monitoring. The interface can be accurately detected even though it may be "cloudy" or be carrying a "rag layer."



Mounted in an explosion-Proof Housing



Mounted in a 4X PVC Housing with Cover Removed



Delta Controls
CORPORATION


OPERATION

The Model 173 utilizes digital admittance technology to measure how much of its sensing probe is covered by the media. This is accomplished by generating a radio frequency pulse of energy, which travels from the sensing probe to the ground reference (usually the tank wall). The amount of media present between the two determines how much energy is transferred. The energy flowing (very small and low level in all cases) is a highly repeatable measure of the media level or interface position. The amount is integrated and used to produce the 4-20 mADC material elevation signal.

BASIC SPECIFICATIONS

Level range:.....Dependent on the probe selected
Minimum Level Span:.....10pF
Maximum Range:2000pF
“Zero” Suppression:to 2000pF
Output:4-20 mADC, 2 wire, loop powered, isolated
Loop Supply Voltage Range:13-35 VDC
Max Loop Impedance:450 ohms @ 24V, 1000 @ 35V
Ambient Operating Temperature:-20 to +175°F (+80°C)
Process Temperature:-460 to +1500°F (-270 to +810°C)
Accuracy and Stability:Within 0.2% of full scale
 (limited to $\pm 2pF$)

OUTLINE DIMENSIONS

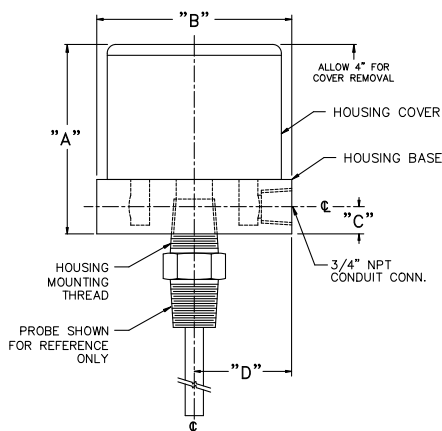

HOUSING RATING AND TYPE	DIMENSIONS			
	A	B	C	D
4X PVC	3.83	5.12	0.625	2.56
7X-P7	4.4	4.7	0.83	2.55

MODEL NUMBERING SYSTEM


BASIC TYPE	HOUSING & RATING	MOUNTING LOCATION	OPTIONS
MODEL EXAMPLE 173	4XR	10'D	AA

ELECTRONICS ONLY (ORDER PROBE SEPARATELY)

BASIC TYPE	
M/N	DESCRIPTION
173	BASIC XMTR
MICROPROCESSOR CONTROLLED 7500 SU MAX RANGE	
HOUSING & RATING	
M/N	HOUSING & RATING *
4XR	4X HOSEPROOF PVC
7W#	EXPLOSION PROOF CLASS 1, DIV. 1, GRPS BCD, EFG ALSO 4 HOSEPROOF
7TR	SAME, EXCEPT, ALL 304 S.S. MATERIAL
REPLACE "W" WITH ONE OF THE FOLLOWING: "T" = MOUNTED INTEGRAL ON THE PROBE HEAD "R" = REMOTE SURFACE MOUNTED (INTER-CONNECTING CABLE REQUIRED)	
* HOUSING ARE THIRD PARTY LISTED CSA AND NRTL/C	

MOUNTING LOCATION	
M/N	CABLE REQUIRED
AA	NO CABLE, INTEGRAL MOUNT
RP	POLY JACKETED CABLE (160 DEG F MAX)
#D	TEFLON JACKETED CABLE (450°F MAX REPLACE "W" WITH TOTAL LENGTH OF CABLE REQUIRED (IN FEET))
OPTIONS	
M/N	DESCRIPTION
AA	NONE
ZZ	CUSTOM CONFIGURATIONS

MODULE LAYOUT AND WIRING

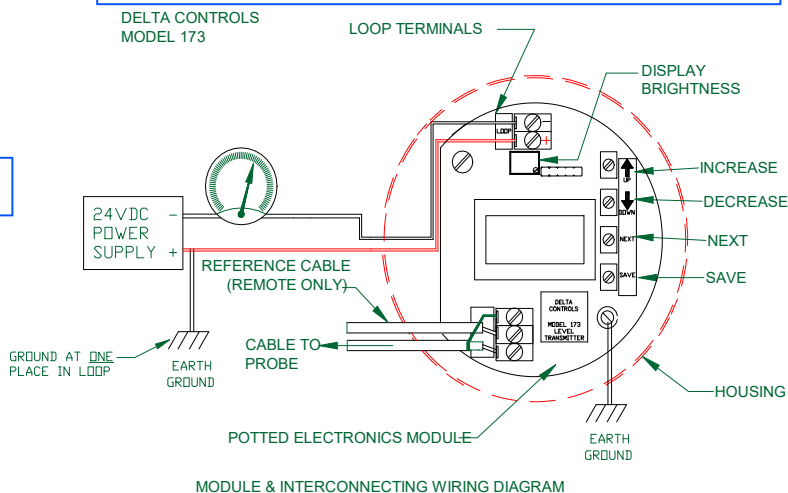

Housings:

- Explosion-proof, Class 1, Division 1, Groups B,C,D, E,F,G; also 4X Hoseproof; Aluminum or 304SS
- 4X Hoseproof, PVC and 304SS

DESIGNED AND BUILT IN THE USA
 BY DELTA CONTROLS



**Engineered
 Reliability**

585 Fortson Street
 Shreveport, La. 71107 - USA
 P: +1(318) 424-8471
 F: +1(318) 425-2421
 sales@deltacnt.com
 www.deltacnt.com