

HTX THERMOCOUPLE FOR CLAUS THERMAL REACTORS AND SULFUR BURNING PROCESSES

FEATURES

- Worldwide standard for protecting Claus Thermal Reactors
- Maintenance free
- Remains accurate under extreme conditions.
- Protects and extends the useful life of refractory and improves reactor up-time
- Over 40 years of proven results in hundreds of installations worldwide
- Keeps working accurately in sulfur service long after other thermocouple designs fail
- Accuracy is continuously verified; self-diagnostic



Model HTX with
6"/150# Flange





APPLICATION

The Delta Controls Model HTX is designed for the primary purpose of reliably protecting a vessel and its refractory lining from excessive temperatures. The HTX provides long-term accuracy and reliability in Claus thermal reactor service.


The design of the HTX is a result of careful attention to design detail, 40 years of experience, and many field installations. The thermocouple junction is isolated from the corrosive and invasive gases by using a constant very low flow flush gas circulating across the junction. The flush gas is kept at a pressure higher than the internal reactor pressure to mitigate the migration of process gases through the element well, body or seals. Process gases that do enter are carried away by the flush gas. The metered flush gas flow has an insignificant effect on the accuracy of the temperature measurement.

All HTX's are built to meet each customer's specific installation requirements, such as; thermocouple type, operating temperatures, nozzle size, insertion length, hazardous area classification and materials of construction. The HTX assembly is furnished complete with all necessary installation components including a HRW Refractory Well and HNP Nozzle Packing Kit. Installation tools are available, and recommended, to accurately produce the refractory bore hole in the correct size and alignment needed for the refractory well and thermocouple assembly.

SPECIFICATIONS


Thermocouple Types:	B, R, S (others available)
Flange Material:	Carbon Steel or Stainless Steel
Trim, Bolting, and Seats:	Stainless Steel
Element Well:	Blended alumina ceramic
Process Connection:	ANSI 6"/150# (150mm) (Std.) Other sizes, types, ratings available
Flush Gas:	Nitrogen (11LPH)
Working Pressure:	150 PSIG (10 Bar) at vessel skin temperature of 500°F (260°C)
Working Temperature:	0 - 3100°F (1700°C)
Included Components:	Model HNP Nozzle packing kit Model HRW Refractory Well
Certifications:	
	70131733 Ex db IIB+H2 T2 Gb Class I Zone 1, AEx db IIB+H2; T2 Gb
	Sira 18ATEX1044X II 2G Ex db IIB+H2 T2 Gb Ta = -20°C to +70°C
 	IECEX SIR 18.0012X Ex db IIB+H2 T2 Gb
Recommended:	Model HFS Flush Gas Station Model H6G Refractory Drill Kit
Optional:	<ul style="list-style-type: none"> • Thermocouple extension lead wire • Refractory diamond drills and casting mandrels • Model HMB mounting bars for "non-vertical" installations • Model HRS Refractory Stop • Field training, consultation and assistance

HTX INSTALLED IN A CLAUS THERMAL REACTOR

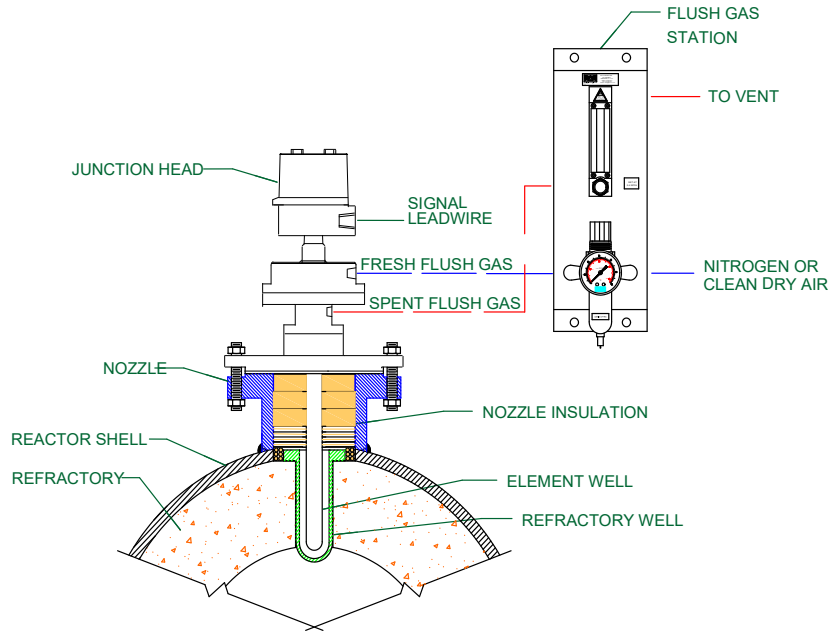

The clean flush gas flows through the HTX and scavenges Hydrogen, Sulfur compounds, and corrosive gases that may migrate through the element well. The gas flows into the upper chamber, down an annulus, over the thermocouple hot junction, back up the inside of the element well, and out through the vent connection to the Model HFS flush gas control station. The pressure is set to approximately 5 PSI (0.34 Bar) above the operating pressure of the reactor. This pressure is set by adjusting the regulator. The flow rate through the unit is set to 11LPH. The metered flush gas flow has an insignificant effect on the accuracy of the temperature measurement.

MODEL NUMBERING SYSTEM



BASIC TYPE	
M/N	DESCRIPTION
HTP	TRIPLE T/C
A105/106 CARBON STEEL BODY	

T/C 1 & T/C 2 & T/C 3	
M/N	DESCRIPTION *
T	COPPER vs. CONSTANTAN
K	CHROMEL vs. ALUMEL
O	OPEN NO T/C
S	PLATINUM vs. +10% RHODIUM
R	PLATINUM vs. +13% RHODIUM
B	PLATINUM +6% RHODIUM
	PLATINUM +30% RHODIUM
C	TUNGSTEN +5% RHODIUM
	TUNGSTEN +26% RHODIUM

INSERTION	
M/N	DESCRIPTION
#	INSERTION
REPLACE *# WITH INCHES OF INSERTION IN TENTHS	

MOUNTING FLANGE		
M/N	DESCRIPTION	STEEL 316SS
4"/150R*	4"/150# RAISED FACE ANSI	
6"/150R*	6"/150# RAISED FACE ANSI	
4"/300R*	4"/300# RAISED FACE ANSI	
6"/300R*	6"/300# RAISED FACE ANSI	
ZZ	OTHER STYLES, TYPES & SIZES	
REPLACE * WITH "S" FOR STEEL "Y" FOR 316 SS		

OPTIONS	
M/N	DESCRIPTION
SS	316 SS TAGS 2.18" x 5.0"
PC	MOUNTING NOZZLE PURGE CONNECTION 1/4" FNPT
NIS	ACCURACY CERTIFICATION CHART; TRACABLE TO NIST
	C/F
BV	BLOCK VALVE FOR REDUNDANT SAFETY SHUTOFF
ZZ	CUSTOM ADAPTATION , MATERIALS, ETC.

Notes:

- (1) Temperature shown is the maximum recommended for continuous service

AUXILIARY COMPONENTS

M/N	DESCRIPTION - SEE SEPARATE DATA SHEETS
HRW	Refractory Well
HNP	Nozzle Packing Kit
HFS	Flush Gas Control Station
H6G	Refractory Drilling Kit
HRS	Nozzle Refractory Stop
HMB	Horizontal Mounting Bars



Engineered
Reliability

585 Fortson Street
Shreveport, La. 71107 - USA
P: +1(318) 424-8471
F: +1(318) 425-2421
sales@deltacnt.com
www.deltacnt.com